


# DMX Ultimate Converter

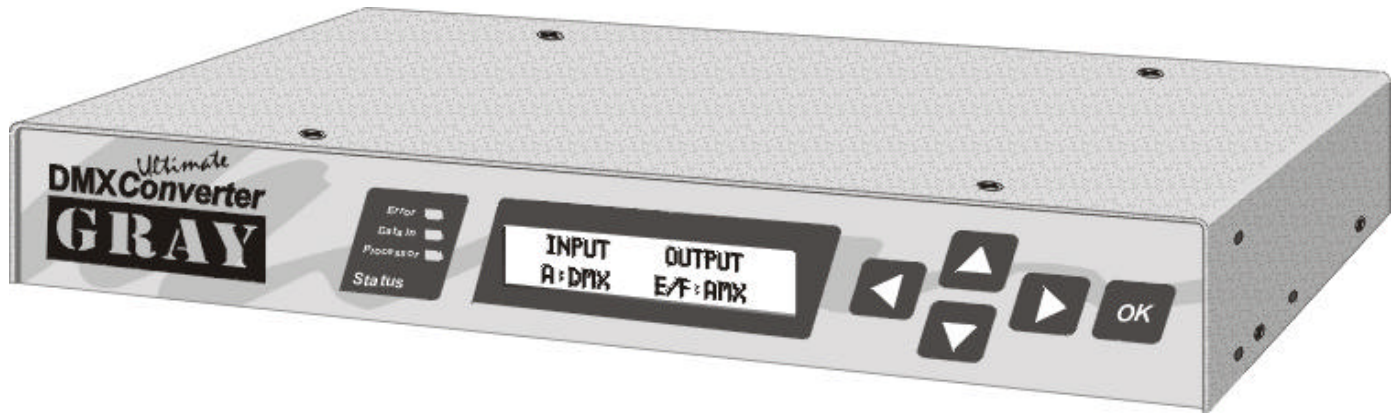

These Interfaces are used to “translate” or convert multiplex lighting protocols. Users can select from the following input and output protocols:

- DMX512
- AMX192
- Kliegl K96
- Colortran CMX
- Electro Controls
- Micro-Plex 1 & 2
- Strand D54
- AVAB

## Features:

- Multiple protocol support in a single unit
- Easy configuration with backlit menu driven LCD display
- Most multiplex protocols supported
- Security lockout function
- Input & output diagnostic functions
- BIOS upgrades via Internet
- Output protocol customization capability

## MODEL DESCRIPTION

8680	Tabletop <i>Ultimate Converter</i> , North America <i>4 &amp; 5 pin XLR input/output connectors</i>
8681	Tabletop <i>Ultimate Converter</i> , Europe <i>3 &amp; 5 pin XLR input/output connectors</i>
8601	Rack mount kit

## SPECIFICATIONS

Power Supply:	Universal 100-240VAC, 50/60 Hz, 0.2A
Size:	10.15 x 1.75 x 7.0 in. (258 x 44 x 178mm)
Input & Output Configuration:	Keypad and 16 character, two line backlit LCD
Software upgrades:	Onboard PC COM port (requires PC)
Enclosure:	Aluminum with gray crinkle powder epoxy

# GRAY

Gray Interfaces, 480C - 36 Avenue S.E.,  
Calgary, AB, T2G 1W4 Canada  
tel (403) 243-8110 fax (403) 287-1281

www.gray-interfaces.com  
sales@gray-interfaces.com

